

PENTURE FESTON

*La penture "référence"
Épaisseur et qualité de finition,
les clés du succès de la penture feston BRASIER*




10B35 - PENTURE FESTON 30X5 GOND Ø12

référence	Long	E	NBR/TROUS
10B35C01N	300	190	2
10B35C03N	400	144	3
10B35C05N	500	128	4
10B35C07N	600	164	4
10B35C09N	700	197	4
10B35C10N	800	230	4


10B40 - PENTURE FESTON 35X5 GOND Ø14

référence	Long	E	NBR/TROUS
10B40C01N	300	190	2
10B40C02N	350	119	3
10B40C03N	400	144	3
10B40C04N	450	171	3
10B40C05N	500	128	4
10B40C06N	550	147	4
10B40C07N	600	164	4
10B40C09N	700	197	4
10B40C10N	800	230	4

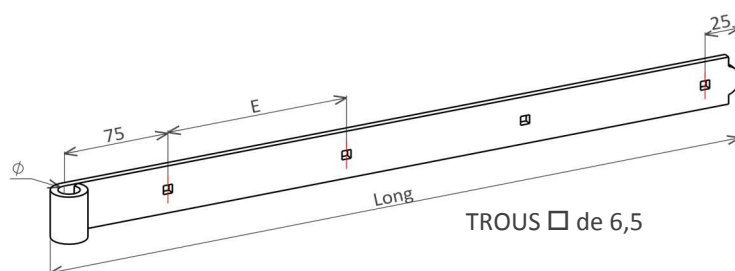


◇ Finition RAL 9005 satiné thermolaquage (voir page 43)
◇ Conditionnement, se référer au tarif (annexe)

PENTURE FESTON

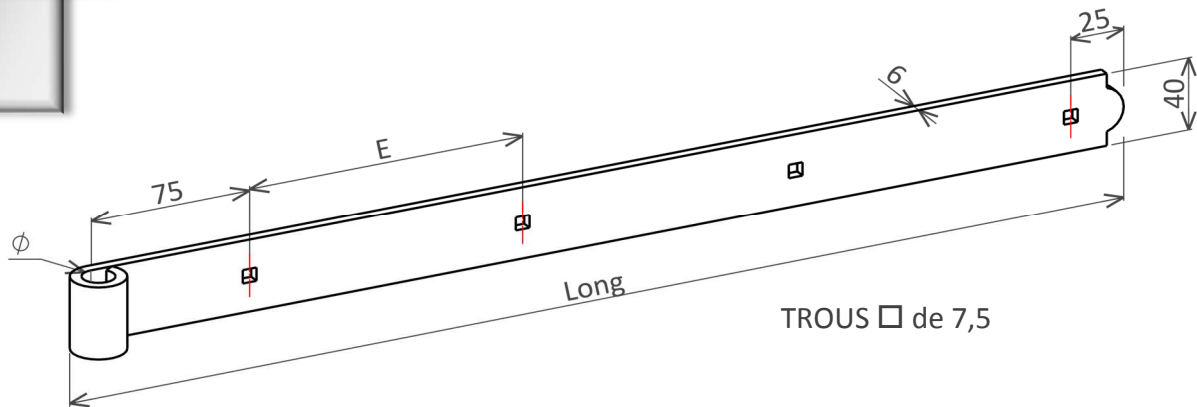

10B46 - PENTURE FESTON 40X6 GOND Ø16

référence	Long	E	NBR/TROUS
10B46C07N	600	164	4
10B46C09N	700	197	4
10B46C10N	800	230	4
10B46C11N	900	197	5
10B46C12N	1000	178	6

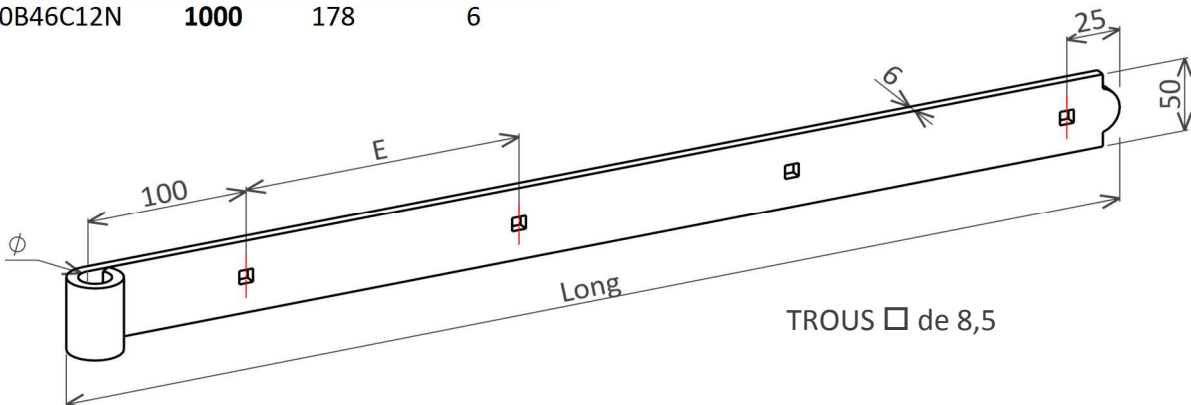

10B56 - PENTURE FESTON 50X6 GOND Ø16

référence	Long	E	NBR/TROUS
10B56C12N	1000	173	6
10B56C14N	1200	213	6

◇ Finition RAL 9005 satiné thermolaquage (voir page 43)
 ◇ Conditionnement, se référencer au tarif (annexe)

TEL. +33 (0)4 50 72 40 49 FAX. +33 (0)4 50 72 49 26
 contact@brasierindustrie.com